

# OCEANAIRE

**MODEL: 2OAC6012**  
**5 TON DELUXE SPOT COOLER**

## TECHNICAL SPECIFICATIONS



**AIR COOLED**



### WARRANTY

ALL OCEANAIRE PRODUCTS ARE COVERED BY THE OCEANAIRE LIMITED WARRANTY

1 YEAR ON THE FULL PRODUCT  
PLUS, 4 ADDITIONAL YEARS FOR THE COMPRESSOR  
(RESTRICTIONS APPLY)

<b>COOLING CAPACITY</b>	<b>60,100 BTUH</b>
VOLTAGE	208-230 V, 60 Hz, Single Phase
AMPS	32 A
WATTS	6000 W
IN RUSH AMPS	178 A
EER	10.0
COMPRESSOR TYPE	SCROLL
COMPRESSOR MOTOR	5 HP
COMPRESSOR RLA	27.6 A
COMPRESSOR LRA	158 A
EVAPORATOR BLOWER	CENTRIFUGAL
EVAP CFM - HIGH	1950
EVAP MOTOR HP	1 HP
CONDENSER BLOWER	CENTRIFUGAL
COND CFM	2200
COND MOTOR HP	1 HP
POWER CORD	8/3
PLUG TYPE	6-50P
CORD LENGTH	10 FT
CONDENSATE REMOVAL	PUMP - AUTOMATIC
LIFT-VERTICAL	20 FT
REFRIGERANT CHARGE	80 OZ., R-410A
HEIGHT W/ CASTERS	51-3/4 in
HEIGHT W/O CASTERS	45-1/2 in
WIDTH	27-1/2 in
DEPTH (with 2-inch Kick Plate)	39-1/2 in
NET WEIGHT	485 lb.

### SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

- OA **Cooling Capacity** is total BTUH at 80°DB/67°WB return air, 95°F Outdoor at high fan speed
- OA Dedicated Circuit and Time Delay fuses/circuit breakers are recommended
- OA EER is determined at high fan speed, with condenser discharge air ducted into another area
- OA CFM with free discharge
- OA Amps & Watts at 208 Volts

**COOLING AMBIENT OPERATING RANGE 65° TO 105°**

**NOT APPROVED FOR OUTDOOR USE**



OA-TS-2OAC6012-07262018

OCEANAIRE  
OCEANAIRE-INC.COM



# OCEANAIRE


## TECHNICAL SPECIFICATIONS

**MODEL: 2OAC6012**

**5 TON DELUXE SPOT COOLER**

### FEATURES:

- OA SOLID STATE ELECTRONIC CONTROLLER
- OA AUTOMATIC 6-SPEED FAN CONTROL WITH MANUAL OVERRIDE
- OA LARGE LED DISPLAY
- OA SWIVEL BALL BEARING CASTERS WITH LOCKS AT FRONT
- OA INTERNAL CONDENSATE PUMP WITH OVERFLOW ALERT
- OA HIGH PRESSURE SAFETY SWITCH
- OA WASHABLE ELECTROSTATIC AIR FILTERS

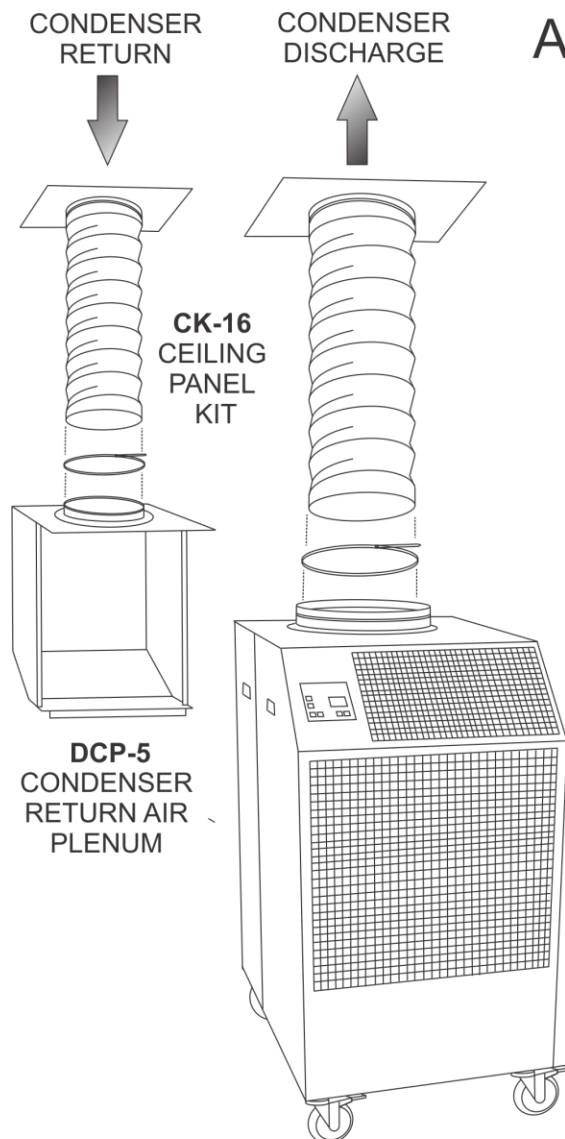

## ACCESSORIES



**NOTE: 2OAC60-MODELS SHIP WITH 16-INCH FLANGE**

OCEANAIRE  
OCEANAIRE-INC.COM

