

# OCEANAIRE

**MODEL: 2OAC1811**  
**1.5 TON DELUXE SPOT COOLER**

## TECHNICAL SPECIFICATIONS



**AIR COOLED**



### WARRANTY

ALL OCEANAIRE PRODUCTS ARE COVERED BY THE OCEANAIRE LIMITED WARRANTY

1 YEAR ON THE FULL PRODUCT PLUS, 4 ADDITIONAL YEARS FOR THE COMPRESSOR (RESTRICTIONS APPLY)

<b>COOLING CAPACITY</b>	<b>16,800 BTUH</b>
VOLTAGE	115 V, 60 Hz, Single Phase
AMPS	14.1 A
WATTS	1670 W
IN RUSH AMPS	75 A
EER	10.0
COMPRESSOR TYPE	ROTARY
COMPRESSOR MOTOR	1-1/2 HP
COMPRESSOR RLA	12.3 A
COMPRESSOR LRA	63 A
EVAPORATOR BLOWER	CENTRIFUGAL
EVAP CFM - HIGH	600
EVAP MOTOR HP	1/8 HP
CONDENSER BLOWER	CENTRIFUGAL
COND CFM	930
COND MOTOR HP	1/8 HP
POWER CORD	14/3
PLUG TYPE	5-20P, LCDI
CORD LENGTH	10 FT
CONDENSATE REMOVAL SIZE	TANK 5 GALLON
REFRIGERANT CHARGE	40 OZ., R-410A
HEIGHT W/ CASTERS	45-3/4 in
HEIGHT W/O CASTERS	40-1/2 in
WIDTH	24 in
DEPTH	30 in
NET WEIGHT	260 lb.

### SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

- OA **Cooling Capacity** is total BTUH at 80°DB/67°WB return air, 95°F Outdoor at high fan speed
- OA Dedicated Circuit and Time Delay fuses/circuit breakers are recommended
- OA EER is determined at high fan speed, with condenser discharge air ducted into another area
- OA CFM with free discharge
- OA Amps & Watts at 115 Volts

**COOLING AMBIENT OPERATING RANGE 65° TO 105°**

**NOT APPROVED FOR OUTDOOR USE**



OA-TS-2OAC1811-07262018

**OCEANAIRE**  
OCEANAIRE-INC.COM



# OCEANAIRE


## TECHNICAL SPECIFICATIONS

### FEATURES:

- OA SOLID STATE ELECTRONIC CONTROLLER
- OA AUTOMATIC 6-SPEED FAN CONTROL WITH MANUAL OVERRIDE
- OA LARGE LED DISPLAY
- OA SWIVEL BALL BEARING CASTERS WITH LOCKS AT FRONT
- OA CONDENSATE TANK ALERT
- OA LCDI POWER CORD
- OA HIGH PRESSURE SAFETY SWITCH
- OA WASHABLE ELECTROSTATIC AIR FILTERS

**MODEL: 2OAC1811**

**1.5 TON DELUXE SPOT COOLER**

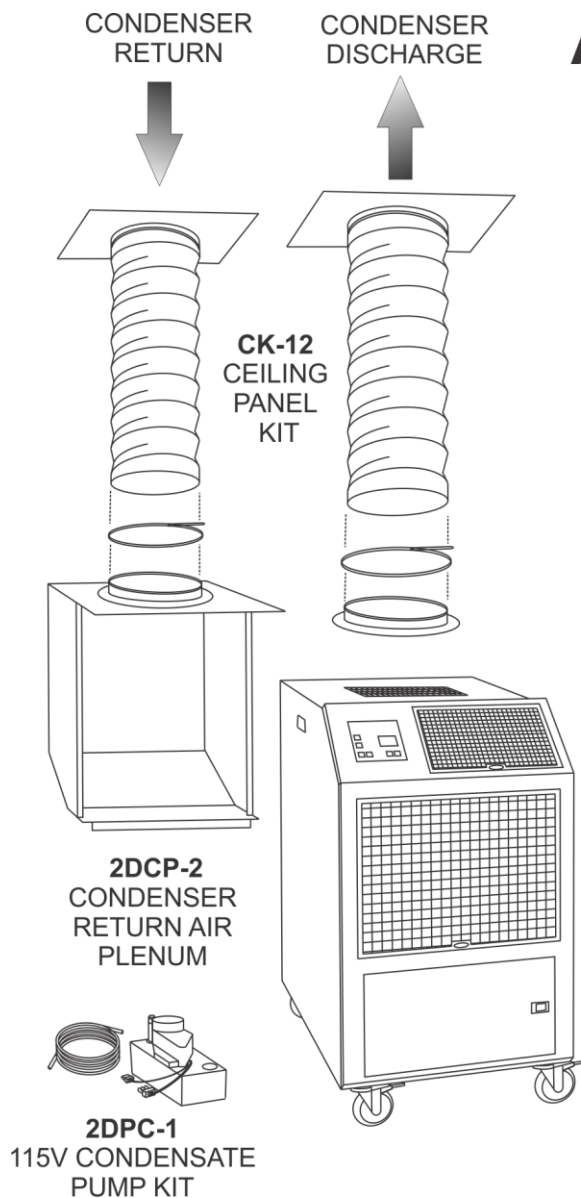

## ACCESSORIES


2NK-2 (2 x 6")  
NOZZLE KIT



2DDA-10  
DISCHARGE  
DUCT ADAPTER



2DEP-12  
EVAPORATOR  
RETURN AIR PLENUM



OCEANAIRE  
OCEANAIRE-INC.COM

