

OCEANAIRE

TECHNICAL SPECIFICATIONS

MODEL: OWC3612

3 TON DELUXE PORTABLE WATER-COOLED AC

COOLING CAPACITY	36,100 BTUH
VOLTAGE	208-230 V, 60 Hz, Single Phase
AMPS	12.0 A
WATTS	2700 W
IN RUSH AMPS	100 A
EER	13.4
COMPRESSOR TYPE	RECIPROCATING
COMPRESSOR MOTOR	3 HP
COMPRESSOR RLA	13.6 A
COMPRESSOR LRA	83 A
EVAPORATOR BLOWER	CENTRIFUGAL
EVAP CFM - HIGH	1200
EVAP MOTOR HP	1/3 HP
EVAP MOTOR AMPS	3.5 A
CONDENSER	COAXIAL
COND GPM at EWT, 60°F	2.2 GPM
COND GPM at EWT, 85°F	9.0 GPM
POWER CORD	14/3
PLUG TYPE	6-20P, LCDI
CORD LENGTH	10 FT
CONDENSATE REMOVAL LIFT (VERTICAL)	PUMP-AUTOMATIC 20 FT
REFRIGERANT CHARGE	24 OZ., R-410A
HEIGHT W/ CASTERS	50-1/4 in
HEIGHT W/O CASTERS	45 in
WIDTH	28-1/4 in
DEPTH	18 in
NET WEIGHT	275 lb.



WATER COOLED



WARRANTY

ALL OCEANAIRE PRODUCTS ARE COVERED BY THE OCEANAIRE LIMITED WARRANTY

1 YEAR ON THE FULL PRODUCT PLUS, 4 ADDITIONAL YEARS FOR THE COMPRESSOR (RESTRICTIONS APPLY)

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

- OA **Cooling Capacity** is total BTUH at 80°DB/67°WB return air, 95°F Outdoor at high fan speed
- OA Dedicated Circuit and Time Delay fuses/circuit breakers are recommended
- OA CFM with free discharge
- OA Amps & Watts at 208 Volts

COOLING AMBIENT OPERATING RANGE 65° TO 105°

NOT APPROVED FOR OUTDOOR USE



OA-TS-OWC3612-07262018

OCEANAIRE
OCEANAIRE-INC.COM




OCEANAIRE

TECHNICAL SPECIFICATIONS

FEATURES:

- OA SOLID STATE ELECTRONIC CONTROLLER
- OA AUTOMATIC 6-SPEED FAN CONTROL WITH MANUAL OVERRIDE
- OA LARGE LED DISPLAY
- OA SWIVEL BALL BEARING CASTERS WITH LOCKS AT FRONT
- OA INTERNAL CONDENSATE PUMP WITH OVERFLOW ALERT
- OA LCDI POWER CORD
- OA WASHABLE ELECTROSTATIC AIR FILTER


MODEL: OWC3612
3 TON DELUXE PORTABLE
WATER-COOLED AC

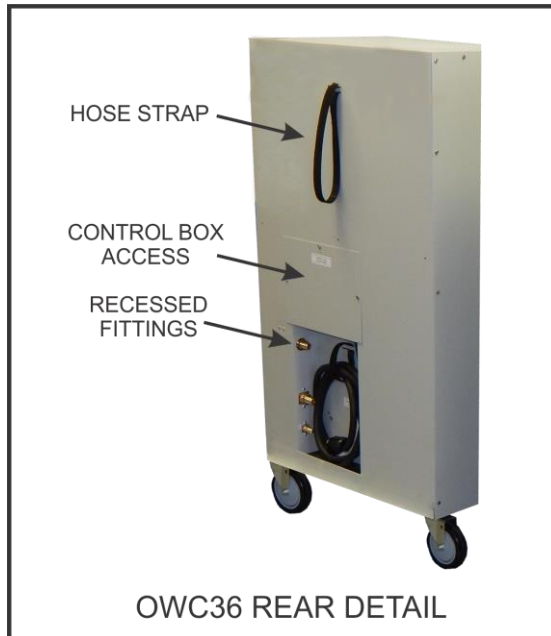


- **POWER CORD STORAGE AND HOSE STRAP**
- **MANUAL RESET HIGH PRESSURE CUT-OUT SWITCH**
- **RECESSED WATER CONNECTIONS**
 - **WATER IN – 5/8 FLARE**
 - **WATER OUT – 5/8 FLARE**
 - **DRAIN – 3/8 FLARE**

ACCESSORIES




2NK-3 (2 x 8")
NOZZLE KIT



2DDA-16
16" DISCHARGE
DUCT ADAPTER



DEP-16
16" EVAPORATOR
RETURN AIR PLENUM

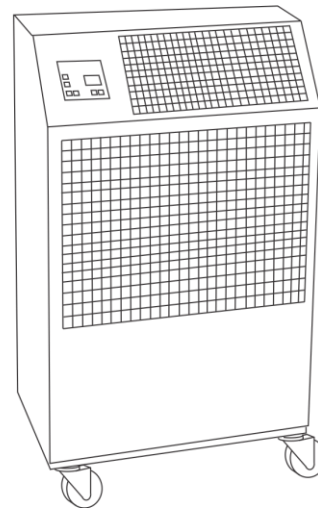

5/8 HOSE KIT

HK-3	10'
HK-4	25'
HK-6	40'

OCEANAIRE
OCEANAIRE-INC.COM

