

OCEANAIRE

TECHNICAL SPECIFICATIONS

MODEL: OWC6012 5 TON DELUXE PORTABLE WATER-COOLED AC

COOLING CAPACITY	60,100 BTUH
VOLTAGE	208-230 V, 60 Hz, Single Phase
AMPS	23.7 A
WATTS	5000 W
IN RUSH AMPS	165 A
EER	12.0
COMPRESSOR TYPE	SCROLL
COMPRESSOR MOTOR	5 HP
COMPRESSOR RLA	27.6 A
COMPRESSOR LRA	158 A
EVAPORATOR BLOWER	CENTRIFUGAL
EVAP CFM - HIGH	1950
EVAP MOTOR HP	1 HP
EVAP MOTOR AMPS	5.2A
CONDENSER	COAXIAL
COND GPM at EWT, 60°F	3.8 GPM
COND GPM at EWT, 85°F	15.0 GPM
POWER CORD	10/3
PLUG TYPE	6-30P, LCDI
CORD LENGTH	10 FT
CONDENSATE REMOVAL LIFT (VERTICAL)	PUMP-AUTOMATIC 20 FT
REFRIGERANT CHARGE	52 OZ., R-410A
HEIGHT W/ CASTERS	51-1/2 in
HEIGHT W/O CASTERS	45-1/4 in
WIDTH	27 in
DEPTH (with 2-inch Kick Plate)	29 in
NET WEIGHT	375 lb.



WATER COOLED



WARRANTY

ALL OCEANAIRE PRODUCTS ARE COVERED BY THE OCEANAIRE LIMITED WARRANTY

1 YEAR ON THE FULL PRODUCT
PLUS, 4 ADDITIONAL YEARS FOR THE COMPRESSOR
(RESTRICTIONS APPLY)

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

- OA **Cooling Capacity** is total BTUH at 80°DB/67°WB return air, 95°F Outdoor at high fan speed
- OA Dedicated Circuit and Time Delay fuses/circuit breakers are recommended
- OA CFM with free discharge
- OA Amps & Watts at 208 Volts

COOLING AMBIENT OPERATING RANGE 65° TO 105°

NOT APPROVED FOR OUTDOOR USE



OA-TS-OWC6012-07262018

OCEANAIRE
OCEANAIRE-INC.COM




OCEANAIRE

TECHNICAL SPECIFICATIONS

MODEL: OWC6012
5 TON DELUXE PORTABLE
WATER-COOLED AC



FEATURES:

- OA SOLID STATE ELECTRONIC CONTROLLER
- OA AUTOMATIC 6-SPEED FAN CONTROL WITH MANUAL OVERRIDE
- OA LARGE LED DISPLAY
- OA SWIVEL BALL BEARING CASTERS WITH LOCKS AT FRONT
- OA INTERNAL CONDENSATE PUMP WITH OVERFLOW ALERT
- OA LCDI POWER CORD
- OA WASHABLE ELECTROSTATIC AIR FILTER

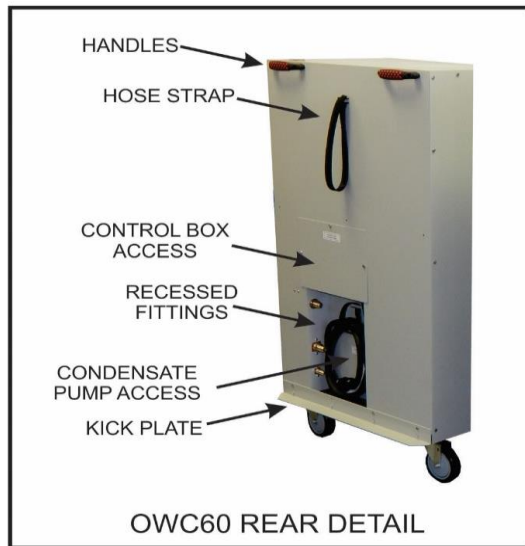

- REAR HANDLES AND KICKPLATE FOR MOBILITY
- POWER CORD STORAGE AND HOSE STRAP
- MANUAL RESET HIGH PRESSURE CUT-OUT SWITCH
- RECESSED WATER CONNECTIONS
 - WATER IN – 5/8 FLARE
 - WATER OUT – 5/8 FLARE
 - DRAIN – 3/8 FLARE

ACCESSORIES

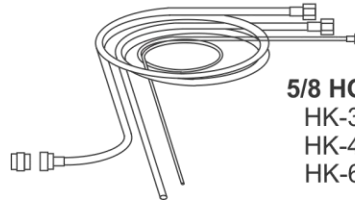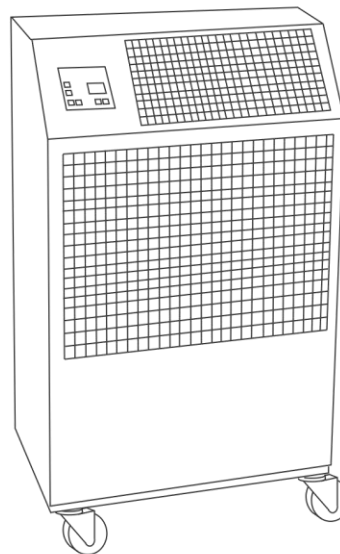


5/8 HOSE KIT
HK-3 10'
HK-4 25'
HK-6 40'



2NK-3 (2 x 8")
NOZZLE KIT



2DDA-16
16" DISCHARGE
DUCT ADAPTER



DEP-16
16" EVAPORATOR
RETURN AIR PLENUM

OCEANAIRE
OCEANAIRE-INC.COM

