

OCEANAIRE

MODEL: PWC2412

2 TON PORTABLE WATER-COOLED AC

TECHNICAL SPECIFICATIONS



WATER COOLED



WARRANTY

ALL OCEANAIRE PRODUCTS ARE COVERED BY THE OCEANAIRE LIMITED WARRANTY

1 YEAR ON THE FULL PRODUCT PLUS, 4 ADDITIONAL YEARS FOR THE COMPRESSOR (RESTRICTIONS APPLY)

COOLING CAPACITY

23,950 BTUH

VOLTAGE	208-230 V, 60 Hz, Single Phase
AMPS	9.9 A
WATTS	2100 W
IN RUSH AMPS	55 A
EER	11.4
COMPRESSOR TYPE	ROTARY
COMPRESSOR MOTOR	2 HP
COMPRESSOR RLA	10.5 A
COMPRESSOR LRA	48 A
EVAPORATOR BLOWER	CENTRIFUGAL
EVAP CFM - HIGH	810
EVAP MOTOR HP	1/3 HP
EVAP MOTOR AMPS	1.8 A
CONDENSER	COAXIAL
COND GPM at EWT, 60°F	1.55 GPM
COND GPM at EWT, 85°F	6 GPM
POWER CORD	14/3
PLUG TYPE	6-20P, LCDI
CORD LENGTH	10 FT
CONDENSATE REMOVAL LIFT (VERTICAL)	CONDENSATE PUMP 20 FT
REFRIGERANT CHARGE	16 OZ., R-410A
HEIGHT W/ CASTERS	39-3/4 in
HEIGHT W/O CASTERS	34-1/2 in
WIDTH	24-1/4 in
DEPTH	13 in
NET WEIGHT	170 lb.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

- OA **Cooling Capacity** is total BTUH at 80°DB/67°WB return air, 95°F Outdoor at high fan speed
- OA Dedicated Circuit and Time Delay fuses/circuit breakers are recommended
- OA CFM with free discharge
- OA Amps & Watts at 208 Volts

COOLING AMBIENT OPERATING RANGE 65° TO 105°

NOT APPROVED FOR OUTDOOR USE



OA-TS-PWC2412-07262018

OCEANAIRE
OCEANAIRE-INC.COM



OCEANAIRE

TECHNICAL SPECIFICATIONS

FEATURES:


- OA 24 VOLT NON-PROGRAMMABLE ELECTRONIC THERMOSTAT
- OA WASHABLE ELECTROSTATIC AIR FILTER
- OA SWIVEL BALL BEARING CASTERS WITH LOCKING FRONTS
- OA 2-SPEED FAN SWITCH
- OA AUTOMATIC WATER REGULATING VALVE
- OA INTERNAL CONDENSATE PUMP WITH OVERFLOW ALERT LIGHT
- OA LCDI POWER CORD
- OA HIGH PRESSURE SAFETY SWITCH

MODEL: PWC 2412


2 TON PORTABLE WATER-COOLED AC

ACCESSORIES




**NK-2 (2 x 6")
NOZZLE KIT**



**DDA-10
DISCHARGE
DUCT ADAPTER**



**2DEP-12
EVAPORATOR
RETURN AIR PLENUM**

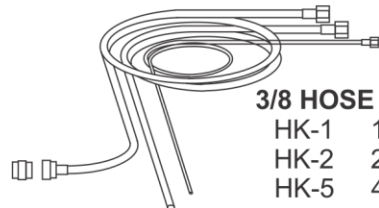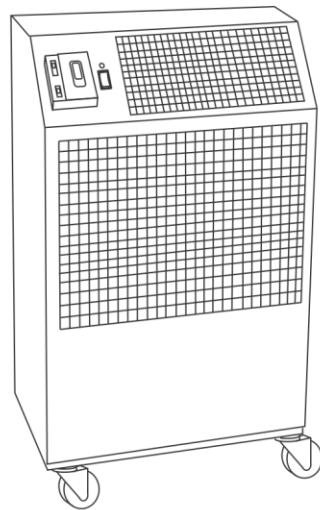

3/8 HOSE KIT

HK-1	10'
HK-2	25'
HK-5	40'

OCEANAIRE
OCEANAIRE-INC.COM

