

OCEANAIRE

MODEL: PWC6032

5 TON PORTABLE WATER-COOLED AC

TECHNICAL SPECIFICATIONS



WATER COOLED



WARRANTY

ALL OCEANAIRE PRODUCTS ARE COVERED BY THE OCEANAIRE LIMITED WARRANTY

1 YEAR ON THE FULL PRODUCT
PLUS, 4 ADDITIONAL YEARS FOR THE COMPRESSOR
(RESTRICTIONS APPLY)

COOLING CAPACITY

60,100 BTUH

VOLTAGE	208-230 V, 60 Hz, Three Phase
AMPS	16.5 A
WATTS	5000 W
IN RUSH AMPS	149 A
EER	12.0
COMPRESSOR TYPE	SCROLL
COMPRESSOR MOTOR	5 HP
COMPRESSOR RLA	18.1 A
COMPRESSOR LRA	137 A
EVAPORATOR BLOWER	CENTRIFUGAL
EVAP CFM - HIGH	1950
EVAP MOTOR HP	1 HP
EVAP MOTOR AMPS	5.2A
CONDENSER	COAXIAL
COND GPM at EWT, 60°F	3.8 GPM
COND GPM at EWT, 85°F	15.0 GPM
COND PRESSURE DROP	2.0 PSIG
POWER CORD	10/4
PLUG TYPE	L15-30P
CORD LENGTH	10 FT
CONDENSATE REMOVAL LIFT (VERTICAL)	CONDENSATE PUMP 20 FT
REFRIGERANT CHARGE	52 OZ., R-410A
HEIGHT W/ CASTERS	51-1/2 in
HEIGHT W/O CASTERS	45-1/4 in
WIDTH	27 in
DEPTH (with 2-inch Kick Plate)	29 in
NET WEIGHT	375 lb.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

- OA **Cooling Capacity** is total BTUH at 80°DB/67°WB return air, 95°F Outdoor at high fan speed
- OA Dedicated Circuit and Time Delay fuses/circuit breakers are recommended
- OA CFM with free discharge
- OA Amps & Watts at 208 Volts

COOLING AMBIENT OPERATING RANGE 65° TO 105°

NOT APPROVED FOR OUTDOOR USE



OA-TS-PWC6032-07262018

OCEANAIRE
OCEANAIRE-INC.COM



OCEANAIRE


TECHNICAL SPECIFICATIONS

FEATURES:

- OA 24 VOLT NON-PROGRAMMABLE ELECTRONIC THERMOSTAT
- OA WASHABLE ELECTROSTATIC AIR FILTER
- OA SWIVEL BALL BEARING CASTERS WITH LOCKING FRONTS
- OA 2-SPEED FAN SWITCH
- OA AUTOMATIC WATER REGULATING VALVE
- OA INTERNAL CONDENSATE PUMP WITH OVERFLOW ALERT LIGHT
- OA THREE PHASE MONITOR



MODEL: PWC 6032

5 TON PORTABLE WATER-COOLED AC

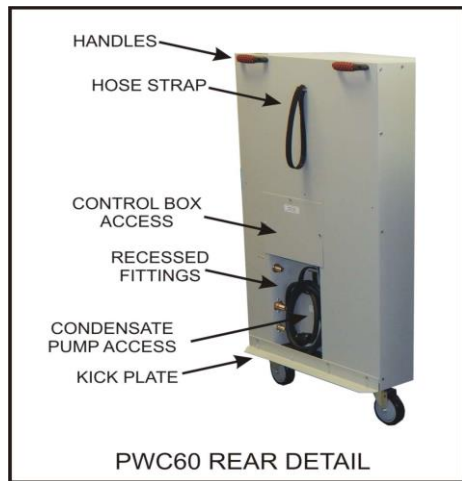

- REAR HANDLES AND KICKPLATE FOR MOBILITY
- POWER CORD STORAGE AND HOSE STRAP
- MANUAL RESET HIGH PRESSURE CUT-OUT SWITCH
- RECESSED WATER CONNECTIONS
 - WATER IN – 5/8 FLARE
 - WATER OUT – 5/8 FLARE
 - DRAIN – 3/8 FLARE


ACCESSORIES

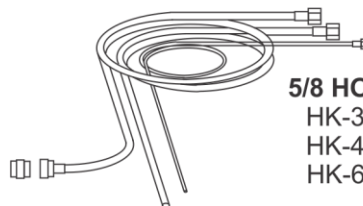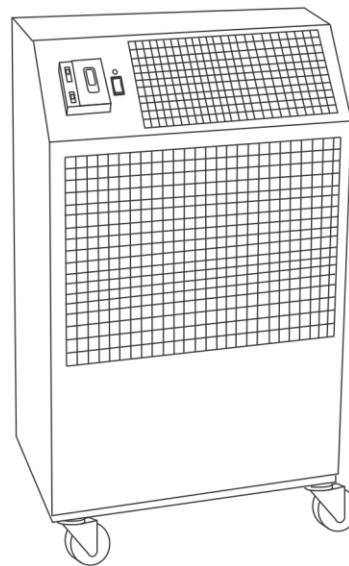

5/8 HOSE KIT

HK-3	10'
HK-4	25'
HK-6	40'


2NK-3 (2 x 8") NOZZLE KIT



2DDA-16 16" DISCHARGE DUCT ADAPTER



DEP-16 16" EVAPORATOR RETURN AIR PLENUM



OCEANAIRE
OCEANAIRE-INC.COM

