

OCEANAIRE

MODEL: PWC6034

5 TON PORTABLE WATER-COOLED AC

TECHNICAL SPECIFICATIONS



WATER COOLED



WARRANTY

ALL OCEANAIRE PRODUCTS ARE COVERED BY THE OCEANAIRE LIMITED WARRANTY

1 YEAR ON THE FULL PRODUCT
PLUS, 4 ADDITIONAL YEARS FOR THE COMPRESSOR
(RESTRICTIONS APPLY)

COOLING CAPACITY

60,100 BTUH

VOLTAGE	460 V, 60 Hz, Three Phase
AMPS	6.3 A
WATTS	5000 W
IN RUSH AMPS	75 A
EER	12.0
COMPRESSOR TYPE	SCROLL
COMPRESSOR MOTOR	5 HP
COMPRESSOR RLA	9.0 A
COMPRESSOR LRA	62 A
EVAPORATOR BLOWER	CENTRIFUGAL
EVAP CFM - HIGH	1950
EVAP MOTOR HP	1 HP
EVAP MOTOR AMPS	5.2A
CONDENSER	COAXIAL
COND GPM at EWT, 60°F	3.8 GPM
COND GPM at EWT, 85°F	15.0 GPM
COND PRESSURE DROP	2.0 PSIG
POWER CORD	10/4
PLUG TYPE	L16-20P
CORD LENGTH	10 FT
CONDENSATE REMOVAL LIFT (VERTICAL)	CONDENSATE PUMP 20 FT
REFRIGERANT CHARGE	52 OZ., R-410A
HEIGHT W/ CASTERS	51-1/2 in
HEIGHT W/O CASTERS	45-1/4 in
WIDTH	27 in
DEPTH (with 2-inch Kick Plate)	29 in
NET WEIGHT	410 lb.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

- OA **Cooling Capacity** is total BTUH at 80°DB/67°WB return air, 95°F Outdoor at high fan speed
- OA Dedicated Circuit and Time Delay fuses/circuit breakers are recommended
- OA CFM with free discharge
- OA Amps & Watts at 460 Volts

COOLING AMBIENT OPERATING RANGE 65° TO 105°

NOT APPROVED FOR OUTDOOR USE



OA-TS-PWC6034-07262018

OCEANAIRE
OCEANAIRE-INC.COM



OCEANAIRE


TECHNICAL SPECIFICATIONS

MODEL: PWC 6034

5 TON PORTABLE WATER-COOLED AC

FEATURES:


- OA 24 VOLT NON-PROGRAMMABLE ELECTRONIC THERMOSTAT
- OA WASHABLE ELECTROSTATIC AIR FILTER
- OA SWIVEL BALL BEARING CASTERS WITH LOCKING FRONTS
- OA 2-SPEED FAN SWITCH
- OA AUTOMATIC WATER REGULATING VALVE
- OA INTERNAL CONDENSATE PUMP WITH OVERFLOW ALERT LIGHT
- OA THREE PHASE MONITOR

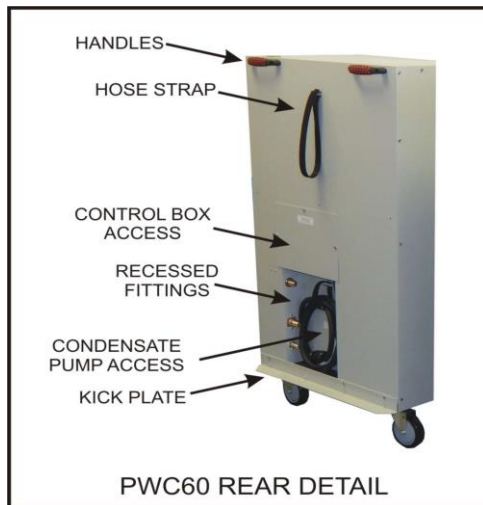


- REAR HANDLES AND KICKPLATE FOR MOBILITY
- POWER CORD STORAGE AND HOSE STRAP
- MANUAL RESET HIGH PRESSURE CUT-OUT SWITCH
- RECESSED WATER CONNECTIONS
 - WATER IN – 5/8 FLARE
 - WATER OUT – 5/8 FLARE
 - DRAIN – 3/8 FLARE

ACCESSORIES




**2NK-3 (2 x 8")
NOZZLE KIT**



**2DDA-16
16" DISCHARGE
DUCT ADAPTER**



**DEP-16
16" EVAPORATOR
RETURN AIR PLENUM**

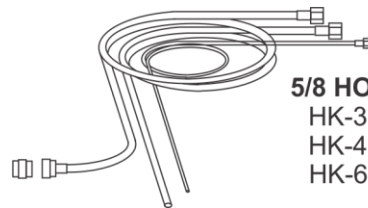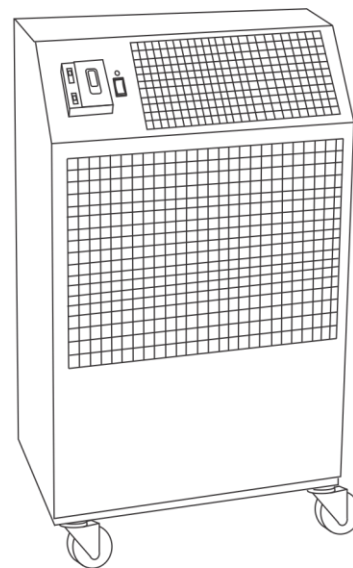

5/8 HOSE KIT

HK-3	10'
HK-4	25'
HK-6	40'

OCEANAIRE
OCEANAIRE-INC.COM

