

OCEANAIRE

MODEL: PWC1811

1.5 TON PORTABLE WATER-COOLED AC

TECHNICAL SPECIFICATIONS



WATER COOLED



WARRANTY

ALL OCEANAIRE PRODUCTS ARE COVERED BY THE OCEANAIRE LIMITED WARRANTY

1 YEAR ON THE FULL PRODUCT PLUS, 4 ADDITIONAL YEARS FOR THE COMPRESSOR (RESTRICTIONS APPLY)

COOLING CAPACITY

18,000 BTUH

VOLTAGE	115 V, 60 Hz, Single Phase
AMPS	11.3 A
WATTS	1300 W
IN RUSH AMPS	69 A
EER	13.8
COMPRESSOR TYPE	ROTARY
COMPRESSOR MOTOR	1-1/2 HP
COMPRESSOR RLA	12.3 A
COMPRESSOR LRA	63 A
EVAPORATOR BLOWER	CENTRIFUGAL
EVAP CFM - HIGH	600
EVAP MOTOR HP	1/8 HP
EVAP MOTOR AMPS	1.8 A
CONDENSER	COAXIAL
COND GPM at EWT, 60°F	1.1 GPM
COND GPM at EWT, 85°F	4.5 GPM
POWER CORD	14/3
PLUG TYPE	5-15P, LCDI
CORD LENGTH	10 FT
CONDENSATE REMOVAL LIFT (VERTICAL)	CONDENSATE PUMP 20 FT
REFRIGERANT CHARGE	18 OZ., R-410A
HEIGHT W/ CASTERS	39-3/4 in
HEIGHT W/O CASTERS	34-1/2 in
WIDTH	24-1/4 in
DEPTH	13 in
NET WEIGHT	155 lb.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

- OA **Cooling Capacity** is total BTUH at 80°DB/67°WB return air, 95°F Outdoor at high fan speed
- OA Dedicated Circuit and Time Delay fuses/circuit breakers are recommended
- OA CFM with free discharge
- OA Amps & Watts at 115 Volts

COOLING AMBIENT OPERATING RANGE 65° TO 105°

NOT APPROVED FOR OUTDOOR USE



OA-TS-PWC1811-07262018

OCEANAIRE
OCEANAIRE-INC.COM



OCEANAIRE

TECHNICAL SPECIFICATIONS

MODEL: PWC1811


1.5 TON PORTABLE WATER-COOLED AC

FEATURES:

- OA 24 VOLT NON-PROGRAMMABLE ELECTRONIC THERMOSTAT
- OA WASHABLE ELECTROSTATIC AIR FILTER
- OA SWIVEL BALL BEARING CASTERS WITH LOCKING FRONTS
- OA 2-SPEED FAN SWITCH
- OA AUTOMATIC WATER REGULATING VALVE
- OA INTERNAL CONDENSATE PUMP WITH OVERFLOW ALERT LIGHT
- OA LCDI POWER CORD
- OA HIGH PRESSURE SAFETY SWITCH

ACCESSORIES




**NK-2 (2 x 6")
NOZZLE KIT**



**DDA-10
DISCHARGE
DUCT ADAPTER**



**2DEP-12
EVAPORATOR
RETURN AIR PLENUM**

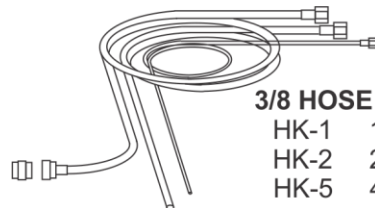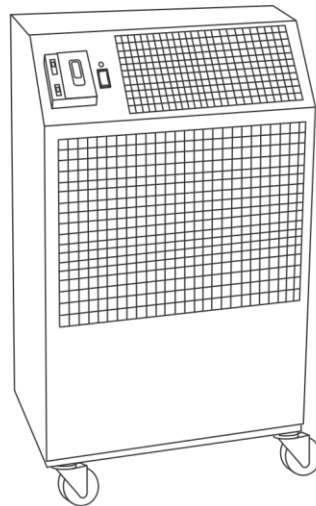

3/8 HOSE KIT

HK-1 10'

HK-2 25'

HK-5 40'

OCEANAIRE
OCEANAIRE-INC.COM

